
CERTIFICATE

Certified Passive House Component


Component-ID 1617wi04 valid until 31st December 2026

Passive House Institute
Dr. Wolfgang Feist
64283 Darmstadt
Germany

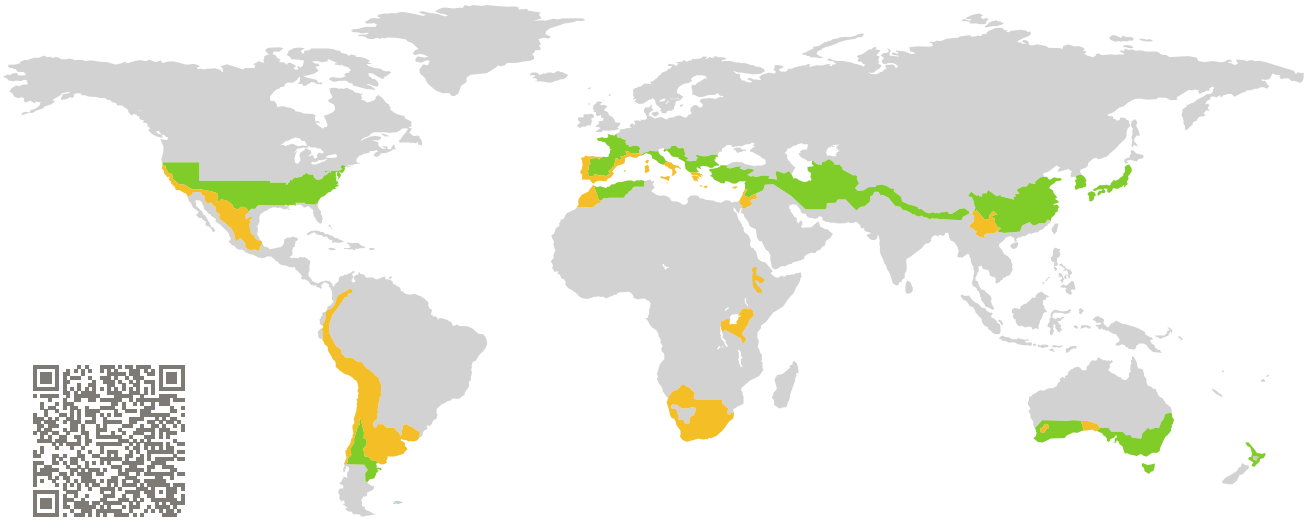

Category:	**Window Frame**
Manufacturer:	**Deceuninck N.V., Borox (Toledo), Spain**
Product name:	**Elegant Infinity**

This certificate was awarded based on the following criteria for the warm, temperate climate zone

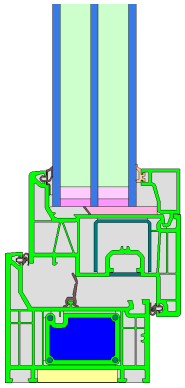

Comfort	U_W = 0.99	≤	1.00 W/(m² K)
	$U_{W,installed}$	≤	1.05 W/(m² K)
	with U_g	=	0.90 W/(m² K)
Hygiene	$f_{Rsi=0.25}$	≥	0.65

warm, temperate climate

phB


Passive House efficiency class	phE	phD	phC	phB	phA

CERTIFIED COMPONENT


Passive House Institute

www.passivehouse.com

Deceuninck N.V.
Avda. de la Industria 1007, 45222 Borox (Toledo), Spain
☎ + 34 925 527 241 | ✉ info@deceuninck.es | http://www.deceuninck.es |

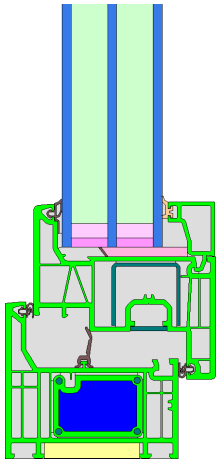

Calculation model

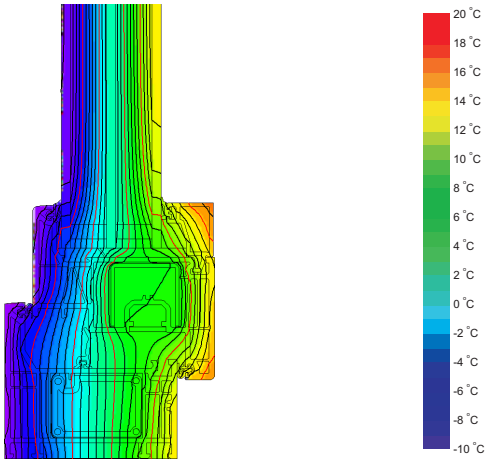

Isothermal

Description

Vinylframe with steel and hard-PVC reinforcements. PUR-insulation (0.031 W/(mK)) inside the blindframe. Max. dimensions in accordance to published technical documents. Variant frame option available, achieving requirements of a suitable PH-frame. Pane thickness: 44 mm (4/16/4/16/4), rebate depth: 20 mm. Spacer: SWISSPACER Ultimate.

Explanation

The window U-values were calculated for the test window size of 1.23 m × 1.48 m with U_g = 0.90 W/(m² K). If a higher quality glazing is used, the window U-values will improve as follows:

Glazing	U_g =	0.90	0.70	0.68	0.64	W/(m² K)
		↓	↓	↓	↓	
Window	U_W =	0.99	0.85	0.84	0.81	W/(m² K)

Transparent building components are classified into efficiency classes depending on the heat losses through the opaque part. The frame U-Values, frame widths, thermal bridges at the glazing edge, and the glazing edge lengths are included in these heat losses. A more detailed report of the calculations performed in the context of certification is available from the manufacturer.

The Passive House Institute has defined international component criteria for seven climate zones. In principle, components which have been certified for climate zones with higher requirements may also be used in climates with less stringent requirements. In a particular climate zone it may make sense to use a component of a higher thermal quality which has been certified for a climate zone with more stringent requirements.


Further information relating to certification
can be found on www.passivehouse.com and passipedia.org.

Frame values		Frame width b_f mm	U-value frame U_f W/(m² K)	Ψ-glazing edge Ψ_g W/(m K)	Temp. Factor $f_{Rsi=0.25}$ [-]
Flying Mullion	(FM1)	158	1.04	0.025	0.68
Bottom	(OB1)	113	1.00	0.025	0.68
Bottom	(OB2)	113	0.97	0.023	0.69
Head	(OH1)	113	1.00	0.025	0.68
Head	(OH2)	113	0.97	0.023	0.69
Jamb	(OJ1)	113	1.00	0.025	0.68
Jamb	(OJ2)	113	0.97	0.023	0.69
Spacer: Swisspacer Ultimate			Secondary seal: Polysulfide		

Validated installations

Cavity wall (operable)

U_{Wall} = 0.22 W/(m² K)

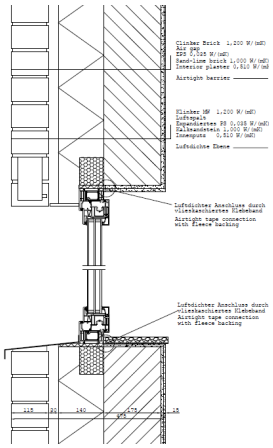


$\Psi_{install}$	W/(m K)
Top	0.004
Side	0.004
Bottom	0.022

$U_{W,installed}$ = 1.02 W/(m² K)

Exterior insulation and finishing system (EIFS) (operable)

U_{Wall} = 0.23 W/(m² K)

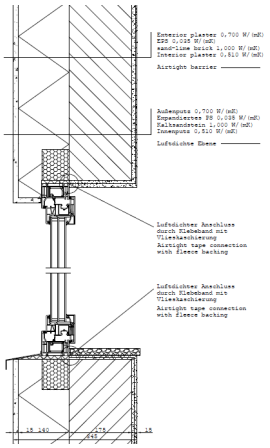


$\Psi_{install}$	W/(m K)
Top	0.009
Side	0.009
Bottom	0.025

$U_{W,installed}$ = 1.03 W/(m² K)

Ventilated facade

U_{Wall} = 0.22 W/(m² K)

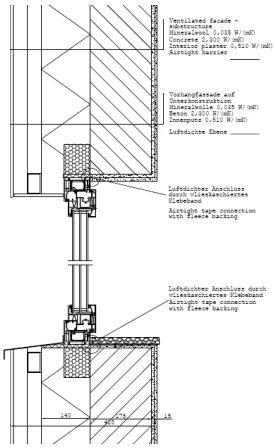

$\Psi_{install}$	W/(m K)
Top	0.003
Side	0.003
Bottom	0.021

$U_{W,installed}$ = 1.01 W/(m² K)

Disclaimer: The Passive House Institute GmbH (PHI) conducts heat-transfer analyses in accordance with the standards set out in Criteria and Algorithms for Certified Passive House Components: Transparent Building Components and Opening Elements in the Building Envelope, based on information provided by the manufacturer. PHI does not verify on-site implementation. It is the responsibility of the project leader to ensure that installed components match the certified specifications in terms of geometry, configuration, and materials. Manufacturers must make full product information available upon request to parties involved in a construction project. These parties may compare the provided information with project documentation and perform on-site inspections as part of the quality-assurance process.